

Erratum

Improved learning of Riemannian metrics for exploratory analysis
[Neural Networks 17 (8–9) 1087–1100][☆]

Jaakko Peltonen^a, Arto Klami^a, Samuel Kaski^{a,b,*}

^aNeural Networks Research Centre, Helsinki University of Technology, P.O. Box 5400, FI-02015 HUT, Finland

^bDepartment of Computer Science, University of Helsinki, P.O. Box 68, FI-00014 Helsinki, Finland

Fig. 3 in the above article should have appeared as below.

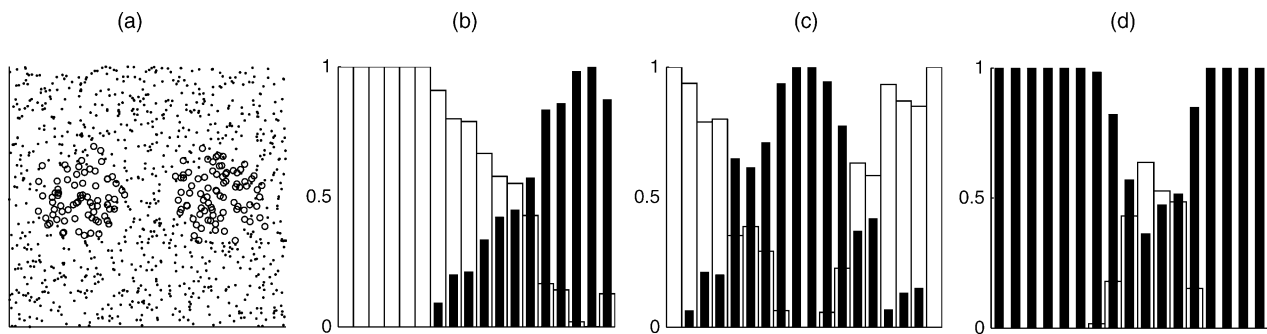


Fig. 3. Demonstration of the importance of topology preservation. The data (a) has two classes: ‘background’ (dots) and ‘effect’ (circles). (b–d) A one-dimensional Sammon’s mapping was computed in three different metrics to project the two-dimensional data samples to the horizontal axis. The vertical axis shows probabilities of the background (black bars) and effect (white bars) classes, estimated within bins of fixed width. (b) Kullback–Leibler divergence. (c) Riemannian learning metric. (d) Euclidean metric.

[☆] DOI of original article 10.1016/j.neunet.2004.06.008

* Corresponding author. Tel.: +358 9 191 51230; fax: +358 9 191 51120.

E-mail address: samuel.kaski@cs.helsinki.fi (S. Kaski).